

PM-K

metering dosing pumps (constant flow rate)

**Metering dosing pumps PM – K series
Constant flow rate.**



- Led power-on
 - Led Alarm
 - Led solenoid pulse
 - LCD display
 - Flow rate digital adjustment by keys
 - Start/Stop key
 - Plastic box IP65 protection degree

PRODGZ

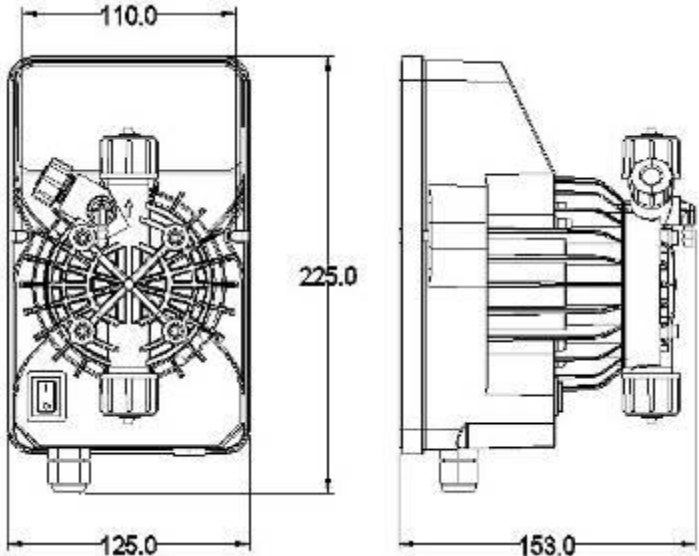
Measure and control instruments for water treatment

PM-K

metering dosing pumps (constant flow rate)

Model	Flow rate max (l/h)	Pressure max (bar)	Frequency max (imp/min)	ml/pulse	Max suction high (m)	Standard power supply (*)	Weight (kg)
PM 01-15	1	15	120	0,14	2.0	230 V – 50/60 Hz	2,3
PM 02-10	2	10	120	0,28	2.0	230 V – 50/60 Hz	2,3
PM 05-07	5	7	120	0,69	2.0	230 V – 50/60 Hz	2,3
PM 10-10	10	10	120	1,39	2.0	230 V – 50/60 Hz	2,3
PM 20-03	20	3	120	2,78	2.0	230 V – 50/60 Hz	2,3
PM 50-01	50	1	120	6,94	2.0	230 V – 50/60 Hz	2,3

(*) Other power supply contact the headquarters

Dimensions	Materials
	<p>Pump head: polypropylene (on request: PVC, SS316, PTFE, PVDF)</p> <p>Diaphragm: PTFE</p> <p>Connections: polypropylene</p> <p>Foot filter: polypropylene</p> <p>Injection valve: polypropylene</p> <p>Suction tube: PVC crystal</p> <p>Delivery tube: polyethylene</p> <p>Standard valves: ball in Pyrex (on request: ceramic)</p> <p>On request valves: Lip in FPM (on request: EPDM)</p> <p>Seats: FPM (on request: EPDM)</p>